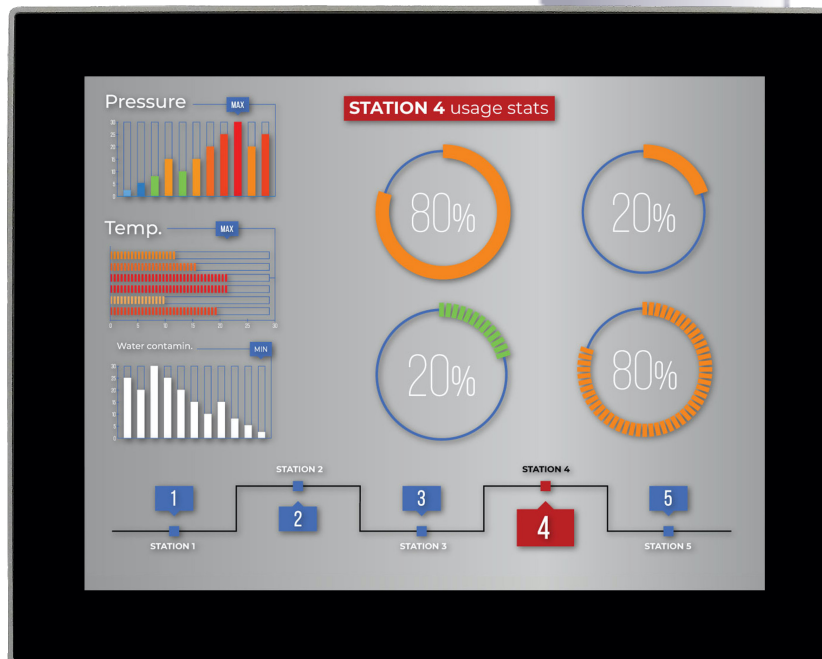




Industrial PC

# PPC-A72-150-C



PN: CS10768R150

Content can change at anytime, check our website for latest information of this product.

[www.chipsee.com](http://www.chipsee.com)

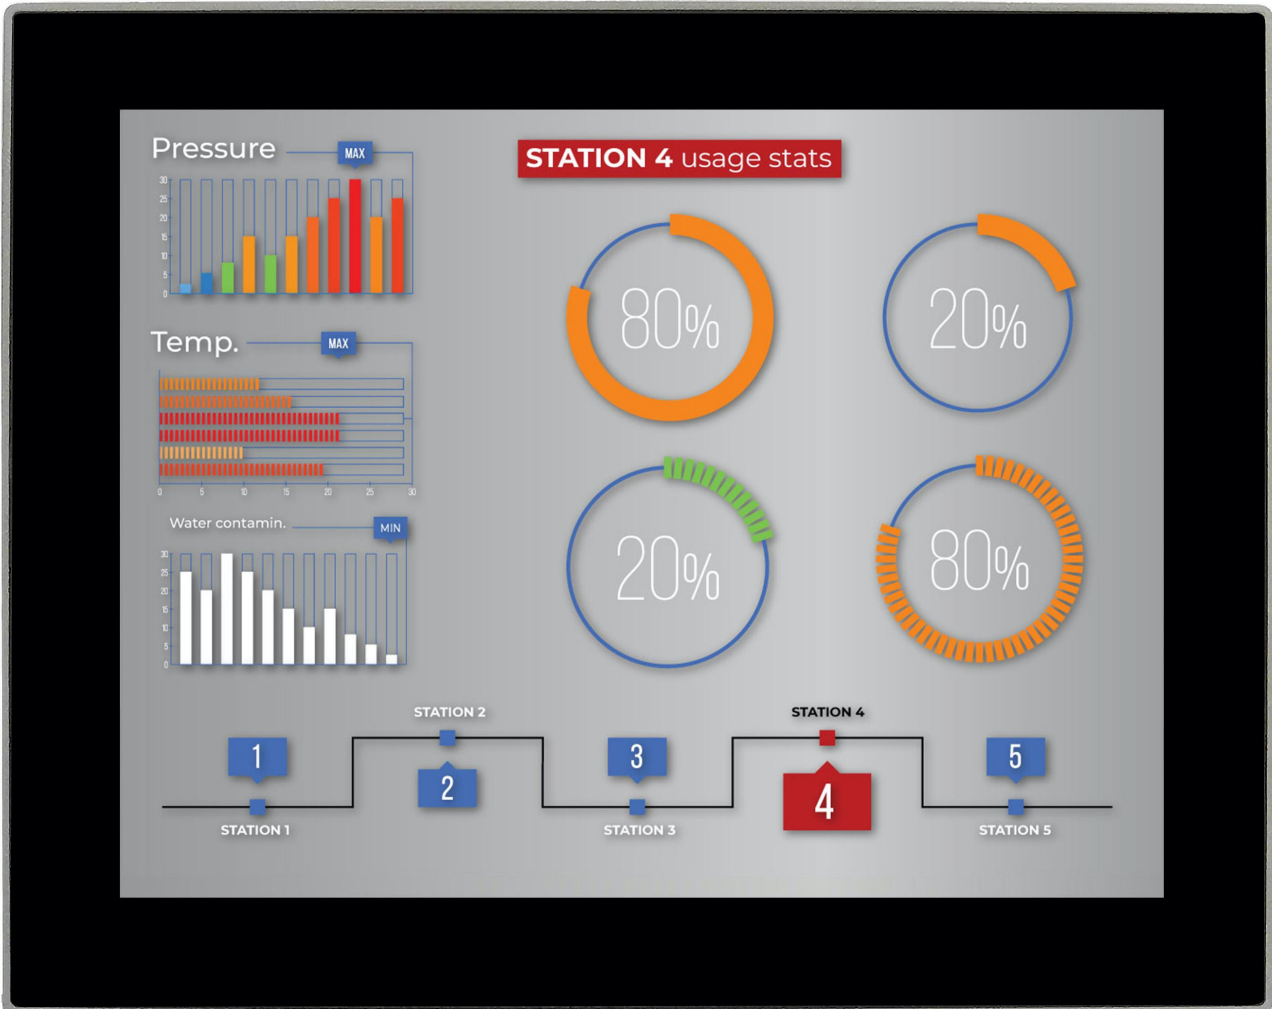
# Contents

---


PPC-A72-150-C	3
1. Product Overview	7
2. Ordering Options	8
2.1. Operating System	8
2.2. Optional Features	9
3. Hardware Features	10
4. Power Input	12
5. Touch Screen	13
6. Connectivity	14
6.1. DB9 Connectors	14
6.2. RS232+RS485 Connector	14
6.3. USB Connectors	17
6.4. LAN Connectors	18
6.5. WiFi & BT Module	19
6.6. 4G/LTE Module	20
6.7. Expansion Connector	21
7. TF Card Slot	23
8. Audio Connectors	24
9. HDMI Connector	25
10. Power Button	26
11. Measurements and Mounting Procedure	27
12. 3D Model	35
13. Disclaimer	36
14. Technical Support	36

# PPC-A72-150-C


## Front View



# Rear View

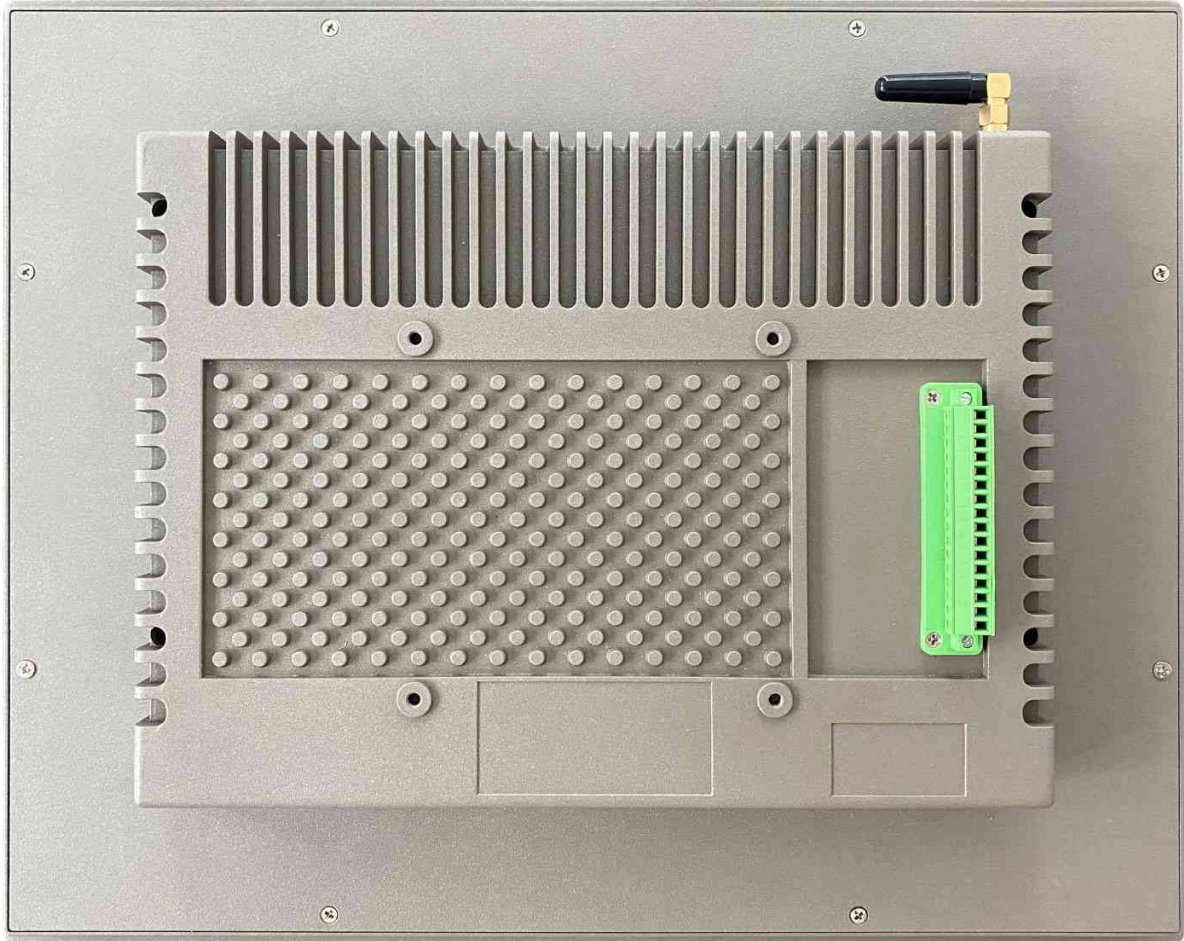

# Side View 1

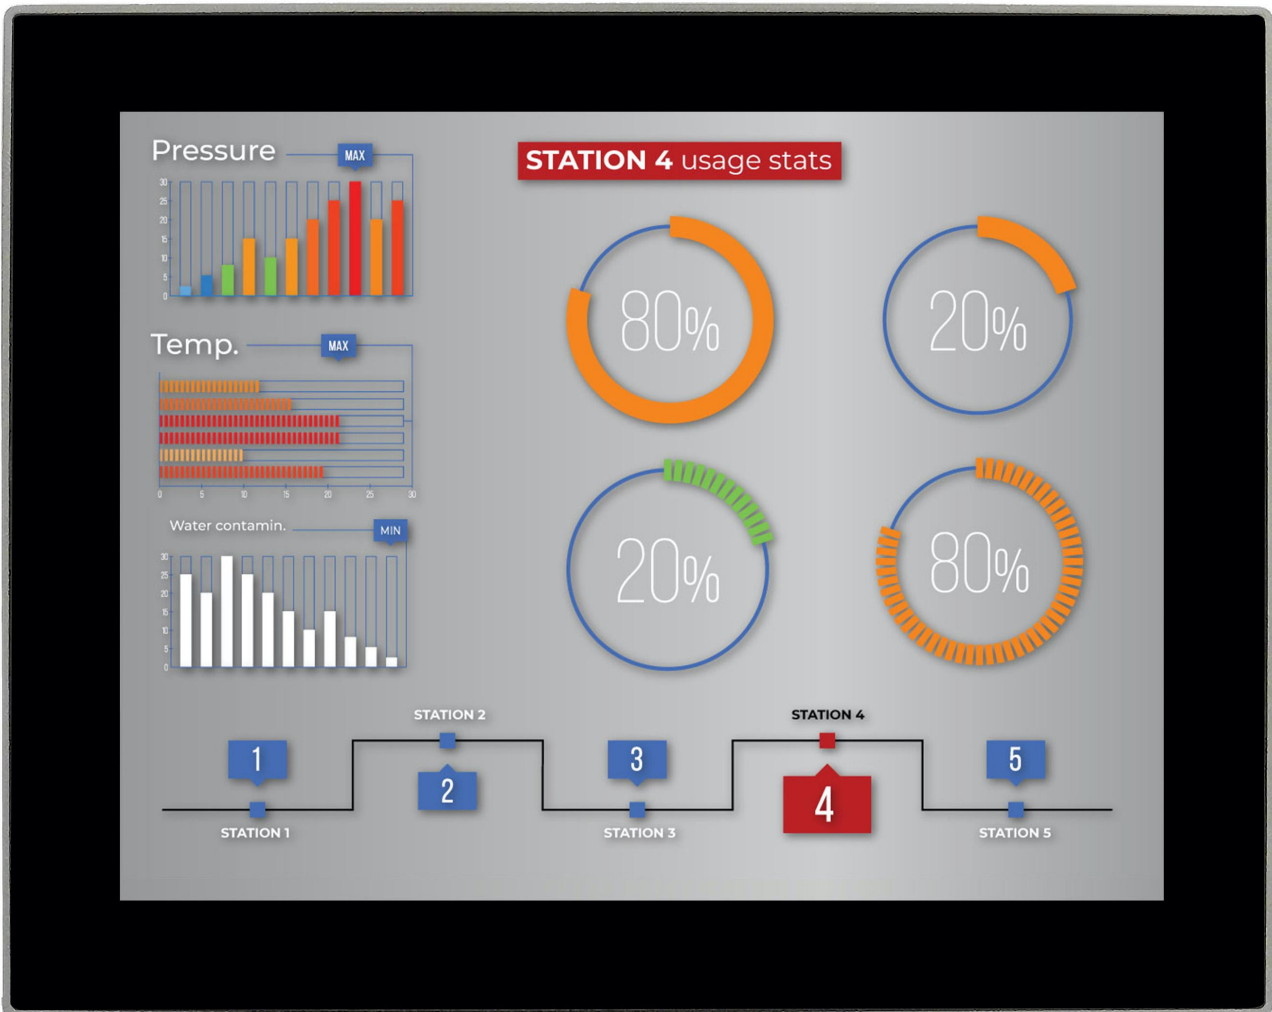

## Side View 2



## Product Overview

The Cortex<sup>®</sup>-A72/53 series PPC-A72-150-C (PN: CS10768R150) is a high-quality industrial panel PC. It features a 15" ten-point capacitive touch screen with a resolution of 1024 x 768 pixels and brightness of 350 cd/m<sup>2</sup>.

### Key Applications

- Human Machine Interface HMI
- Mobile Applications
- Video Processing
- Machine Learning
- Video Gaming
- Process Control
- Process Monitoring
- ATM...

It is available both as an embedded solution and as a device housed in an aluminum casing with bezels, thus facilitating different installation options:

- Installation on an industrial cabinet
- Integration with the existing equipment

The PPC-A72-150-C Industrial Panel PC is based around the powerful CS-SOM-RK3399 System on Module (SoM), powered by the Rockchip RK3399 low-power processor which integrates a dual-core Cortex<sup>®</sup>-A72 and a quad-core Cortex<sup>®</sup>-A53 with a separate NEON coprocessor.

The RK3399 supports multi-format video decoders and has a high-performance dual-channel external memory interface (DDR3/DDR3L/LPDDR3/LPDDR4) capable of sustaining demanding memory bandwidths. It also provides a complete set of peripheral interfaces.

## Ordering Options

Chipsee products can be customized during the ordering process. The product will be shipped with the pre-installed factory defaults if no extra requirements are specified. The table in the [Hardware Features](#) section provides information about the default options bundled with the product.

### Note

You can order [PPC-A72-150-C](#) from the official [Chipsee Store](#) or from your nearest distributor.

## Operating System

This product comes with a pre-installed OS of your choice. Please see the list below for the supported OSes, which can be also obtained from the [Software Documentation](#) section, along with the detailed installation instructions.

- Buildroot Linux Qt5.14\*
- Android 7.1
- Debian 10

\* (Formerly Chipsee Linux) Based on buildroot that has been integrated with:

1. Chipsee Hardware Test Application
2. An initialization script for GPIO/Buzzer/Audio
3. Multiple libraries, such as the `libQt5Sql` to develop Qt application with SQL
4. Various packages, such as the `ntfs-3g` to use NTFS file system

### Warning

The [Software Documentation](#) section provides a detailed instruction on how to install different OSes on your own. However, bear in mind that Chipsee can't take the responsibility of inadequate installation procedure. If you "brick" your device, please contact Chipsee Technical Support at [support@chipsee.com](mailto:support@chipsee.com) for further assistance



## Optional Features

The PPC-A72-150-C Industrial Panel PC does not include 4G/LTE module by default. The module is optional and can be selected at the Chipsee store during the ordering process.

### **Warning**

Installation, repair, and maintenance tasks should be performed by trained personnel only.  
Chipsee does not bear any responsibility for damage caused by inadequate handling of the product.

## Hardware Features

The PPC-A72-150-C Industrial Panel PC offers a broad range of performance and connectivity options for scalable integration, providing expandability to meet future needs. Some of the key features are listed in the table below.

PPC-A72-150-C	
<b>CPU</b>	Rokchip RK3399, Dual-core Cortex-A72 (1.8GHz), Quad-core Cortex-A53 (1.4GHz)
<b>RAM</b>	4GB DDR3
<b>eMMC</b>	16GB
<b>Storage</b>	TF Card, Supports up to 32GB SDHC
<b>Display</b>	15" LCD, 1024 x 768, High Brightness: 350 cd/m <sup>2</sup>
<b>Touch</b>	10-point capacitive touch screen
<b>USB</b>	4 x USB 2.0 HOST, 1 x USB 3.0 HOST, 1 x USB Type-C
<b>LAN</b>	1 x RJ45, GbE
<b>Audio</b>	3.5mm Audio Out Connector, 2W Internal Speaker
<b>Buzzer</b>	Yes
<b>RTC</b>	Yes
<b>RS232</b>	6 x RS232 <sup>1</sup>
<b>RS485</b>	1 x RS485 (4 at most, 1 debug port) <sup>1</sup>
<b>GPIO</b>	8 Channels
<b>WiFi/BT</b>	Integrated WiFi/BT Module
<b>HDMI</b>	1 x HDMI
<b>4G/LTE</b>	Supported, Optional
<b>Power Input</b>	From 12V to 36V
<b>Current at 15V</b>	1000mA Max
<b>Power Consumption</b>	15W Typical
<b>Working Temperature</b>	From 0°C to +70°C
<b>OS</b>	Android 7.1
<b>Dimensions</b>	377 x 307 x 58mm
<b>Weight</b>	4100g
<b>Mounting</b>	VESA & Panel methods

## Table 137 Key Features

---

**1(1,2)**This product has 7 x UART channels in total. The default configuration is 5 x RS232 and 2 x RS485. UART can be swapped between RS232 and RS485 modes easily, so if you need different RS232/RS485 configuration, please get in touch with the Chipsee Technical Support at [support@chipsee.com](mailto:support@chipsee.com)

## Power Input

The PPC-A72-150-C Industrial Panel PC can be powered by a wide range of input voltages: From 12V to 36V DC. The power input connector is a **3-pin, 3.81mm terminal**. The polarity and the pinout is clearly marked on the housing of the product as shown on the figure below.

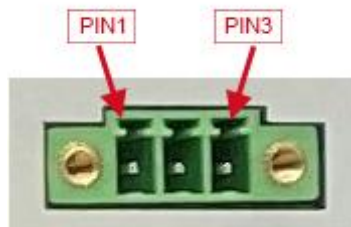


Figure 535: Power Input

Note that the “+” sign represents the positive power input, and it is printed both at the casing and as a silk-screen on a PCB of the embedded version. The “-” terminal is shorted to the ground.

Power Input Definition		
Pin Number	Definition	Description
Pin 1	Positive Input	DC Power <b>Positive Terminal</b>
Pin 2	Negative Input	DC Power <b>Negative Terminal</b>
Pin 3	Ground	<b>Power System Ground</b>

Table 138 Power Connector

### Note

The system ground “G” is connected to power negative “-” on board.

# Touch Screen

The PPC-A72-150-C Industrial Panel PC uses a 10-point capacitive touch screen.

## Attention

A capacitive touch screen is susceptible to power noise and Electromagnetic Radiation (EMR). It may cause LCD ripples or even capacitive touch malfunction. If using a capacitive multi-touch test application, you might notice the touch points float erratically across the display. There are several solutions to this problem:

1. Use a high-quality Power Adapter Unit (PSU) with low EMR. You can also provide power from a battery.
2. Make sure that the PPC-A72-150-C Power Input connector (pin 3) is properly connected to the Power System Ground to provide sufficient EMI shielding and eliminate the problem entirely.
3. Bad GND problem can also be confirmed by touching pin 3 of the Power Input connector with one hand while operating the capacitive touch screen with the other hand. In this case, the operator's body acts as the Power System Ground.

## Connectivity

There are many connectivity options available on the PPC-A72-150-C industrial PC. It has 4 x USB 2.0 HOST, 1 x USB 3.0 HOST, 1 x USB Type-C, 1 x RJ45, GbE Ethernet connector, 6 x UART terminals (RS232/485), and 1 x DB9 connector.

### DB9 Connectors

The PPC-A72-150-C Industrial Panel PC has 1 x DB9 connector that is configured for debugging by default as shown on the figure below.



Figure 536: DB9 Connector

### RS232+RS485 Connector

The serial communication interfaces (RS485 and RS232) are routed to a **16-pin 3.81mm terminal**, as illustrated in the figure below. Serial communication on both RS485 and RS232 interfaces can reach up to 115200 kbps.

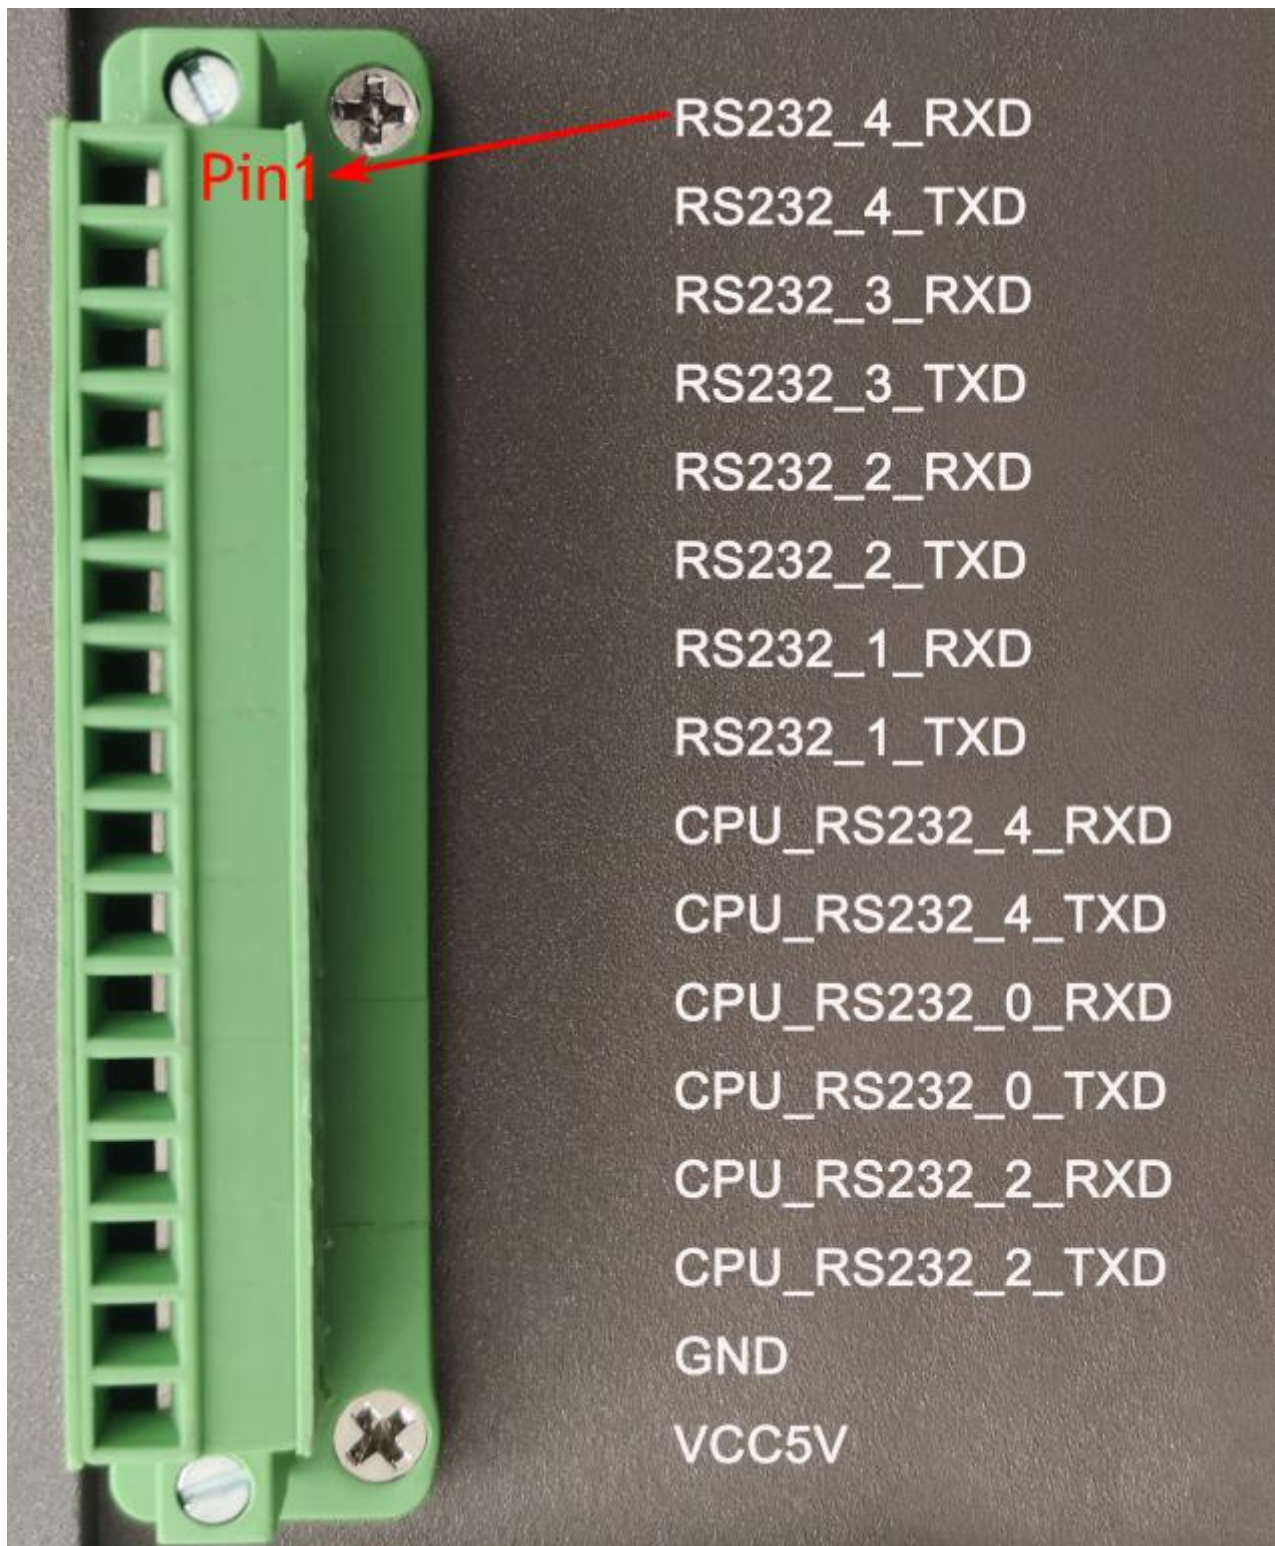



Figure 537: Serial pins connector

The table below offers more detailed description of every pin and its definition:

RS232 / RS485 / CAN Pin Definition:		
Pin Number	Definition	Description
Pin 1	RS232_4_RXD	USB RS232 4 RXD signal
Pin 2	RS232_4_TXD	USB RS232 4 TXD signal
Pin 3	RS232_3_RXD	USB RS232 3 RXD signal

Pin 4	RS232_3_TXD	USB RS232 3 TXD signal
Pin 5	RS232_2_RXD	USB RS232 2 RXD signal
Pin 6	RS232_2_TXD	USB RS232 2 TXD signal
Pin 7	RS232_1_RXD	USB RS232 1 RXD signal
Pin 8	RS232_1_TXD	USB RS232 1 TXD signal
Pin 9	CPU_RS232_4_RXD	CPU UART4, RS232 RXD signal
Pin 10	CPU_RS232_4_TXD	CPU UART4, RS232 TXD signal
Pin 11	CPU_RS232_0_RXD	CPU UART0, RS232 RXD signal
Pin 12	CPU_RS232_0_TXD	CPU UART0, RS232 TXD signal
Pin 13	CPU_RS232_2_RXD	CPU UART2, RS232 RXD signal
Pin 14	CPU_RS232_2_TXD	CPU UART2, RS232 TXD signal
Pin 15	GND	System Ground
Pin 16	VCC5V	System +5V output, up to 1A

Table 139 Connectivity Section

 **Note**

If you need different RS232/RS485 configuration, contact the Chipsee Technical Support at [support@chipsee.com](mailto:support@chipsee.com).



## USB Connectors

There are 4 x dual **USB 2.0 HOST connectors** onboard, as shown on the figure below.



Figure 538: *USB 2.0 HOST Connectors*

There is also 1 x **USB 3.0 HOST connector** and 1 x **USB Type-C connector**, as shown below.



Figure 539: *USB 3.0 HOST Connector*



Figure 540: *USB Type-C Connector*

## LAN Connectors

**LAN (RJ45) connector** provides Ethernet connectivity over standardized Ethernet cables as shown the figure below. The integrated Ethernet interface supports up to 1 Gbps data throughput.



Figure 541: *RJ45 LAN Connector*

### Note

Use CAT5 or better cables to achieve full data throughput over maximum distance defined by the 1000BASE-T standard (100m).

## WiFi & BT Module

The PPC-A72-150-C Industrial Panel PC is equipped with the popular **Realtek RTL8723 WiFi/BT module** that supports BT/BLE 4.0 (with backward compatibility), as well as 802.11bgn 2.4 GHz Wireless LAN (WLAN).

The product includes an SMA connector for an external WiFi/BT antenna, as illustrated in the figure below.

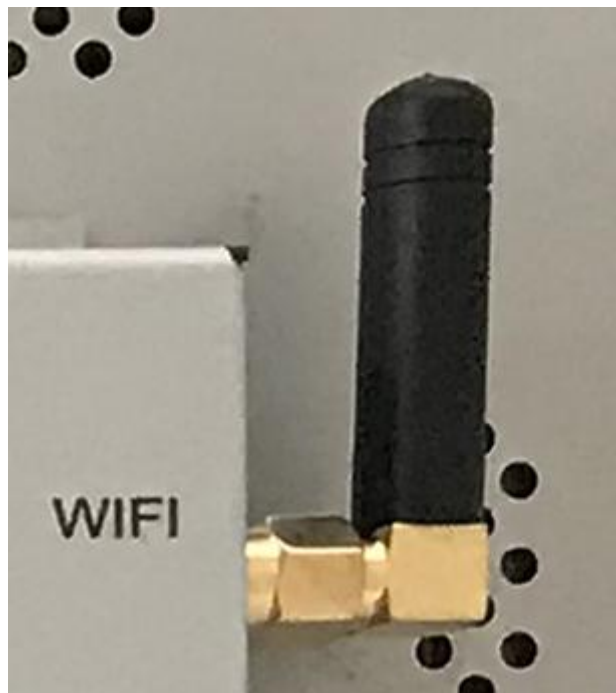


Figure 542: WiFi+BT Antenna

## 4G/LTE Module

The PPC-A72-150-C Industrial Panel PC is equipped with a **mini-PCIe connector** that can connect to a 4G/LTE module. The customer will also need a SIM Card Holder and a 4G/LTE Antenna Connector to ensure 4G/LTE works on the PPC-A72-150-C.

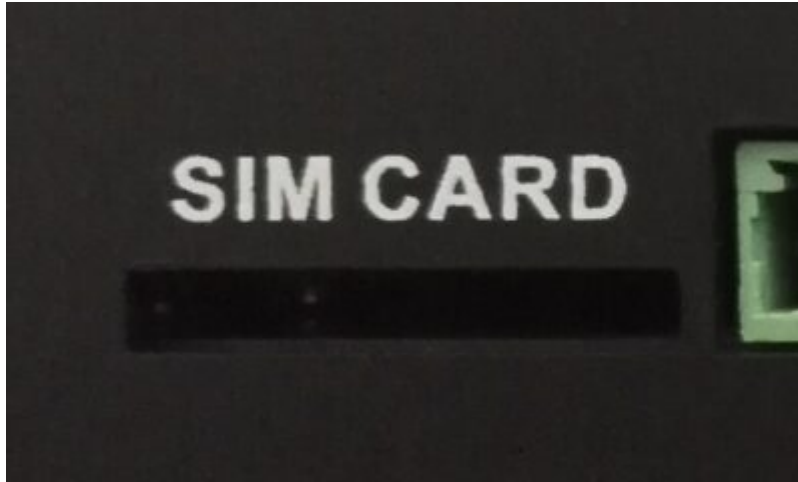


Figure 543: *SIM Card Holder*

### Attention


The product does not come shipped with the 4G/LTE module by default.

## Expansion Connector

The PPC-A72-150-C Industrial Panel PC has 1 x **Expansion Connector** (closed by default), as shown on the figure below. This connector has connected to isolated GPIO signals. The table below gives details about the definition of every Pin.



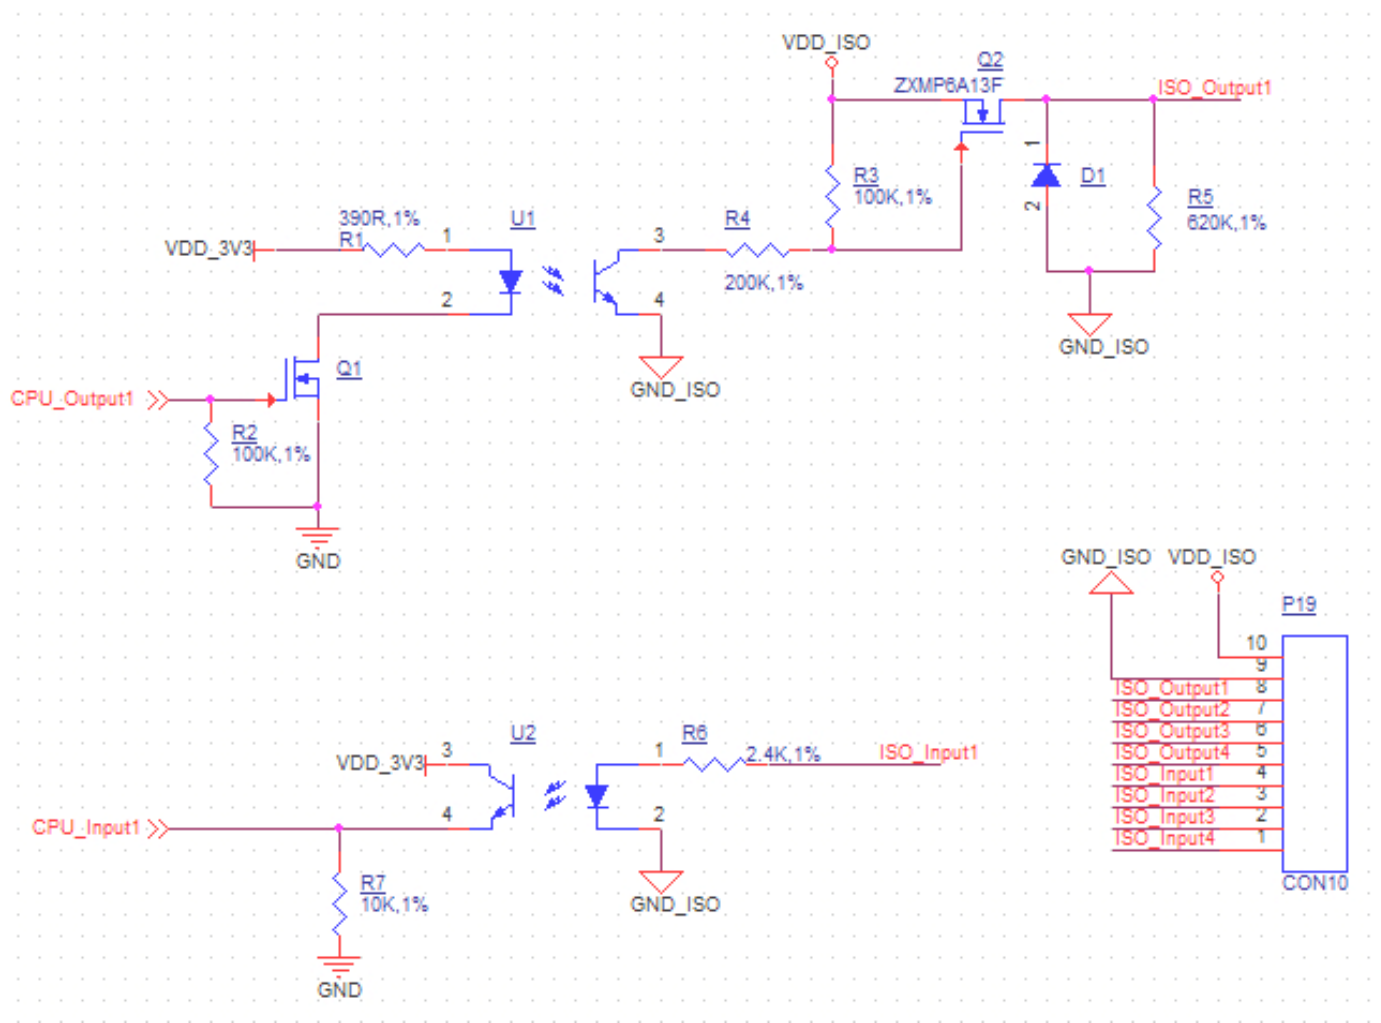Figure 544: Expansion Connector



Isolated GPIO reduced schematic

Expansion Connector Pinout			
PIN	Function	PIN	Function
1	VDD, Isolated Power Input (+5V - +24V)	2	GND_ISO
3	OUT1	4	OUT2
5	OUT3	6	OUT4
7	IN1	8	IN2
9	IN3	10	IN4

Table 140 Expansion Connector Pinout

 **Warning**

Since the PCB traces of the port are connected to the processor directly, be careful not to cause electrostatic discharge or over voltage on the pins, as it may damage the processor. Take all the necessary precautions while working with electrostatic-sensitive equipment.

## TF Card Slot

The PPC-A72-150-C Industrial Panel PC features 1 x **TF Card (micro SD) slot**. It can address up to 32GB of memory.



Figure 545: *TF (micro SD) Card Slot*

### Note

The product does not come shipped with the TF Card by default.

## Audio Connectors

The PPC-A72-150-C Industrial Panel PC features some audio peripherals, as well. It has 1 x **3.5mm audio output jack**.



Figure 546: *Audio Out Connector*



## HDMI Connector

The PPC-A72-150-C Industrial Panel PC is equipped with 1 x **HDMI connector**. The HDMI connector allows connecting an additional (external) monitor. HDMI output resolution can be configured by the software.



Figure 547: *HDMI Connector*

## Power Button

The PPC-A72-150-C Industrial Panel PC has a power button, as shown on the figure below. You can use the button to power ON or OFF the industrial PC.



Figure 548: *Power button*

# Measurements and Mounting Procedure

The outer mechanical dimensions of PPC-A72-150-C are 377 x 307 x 58mm (W x L x H). Please refer to the technical drawing in the figure below for details related to the specific product measurements.

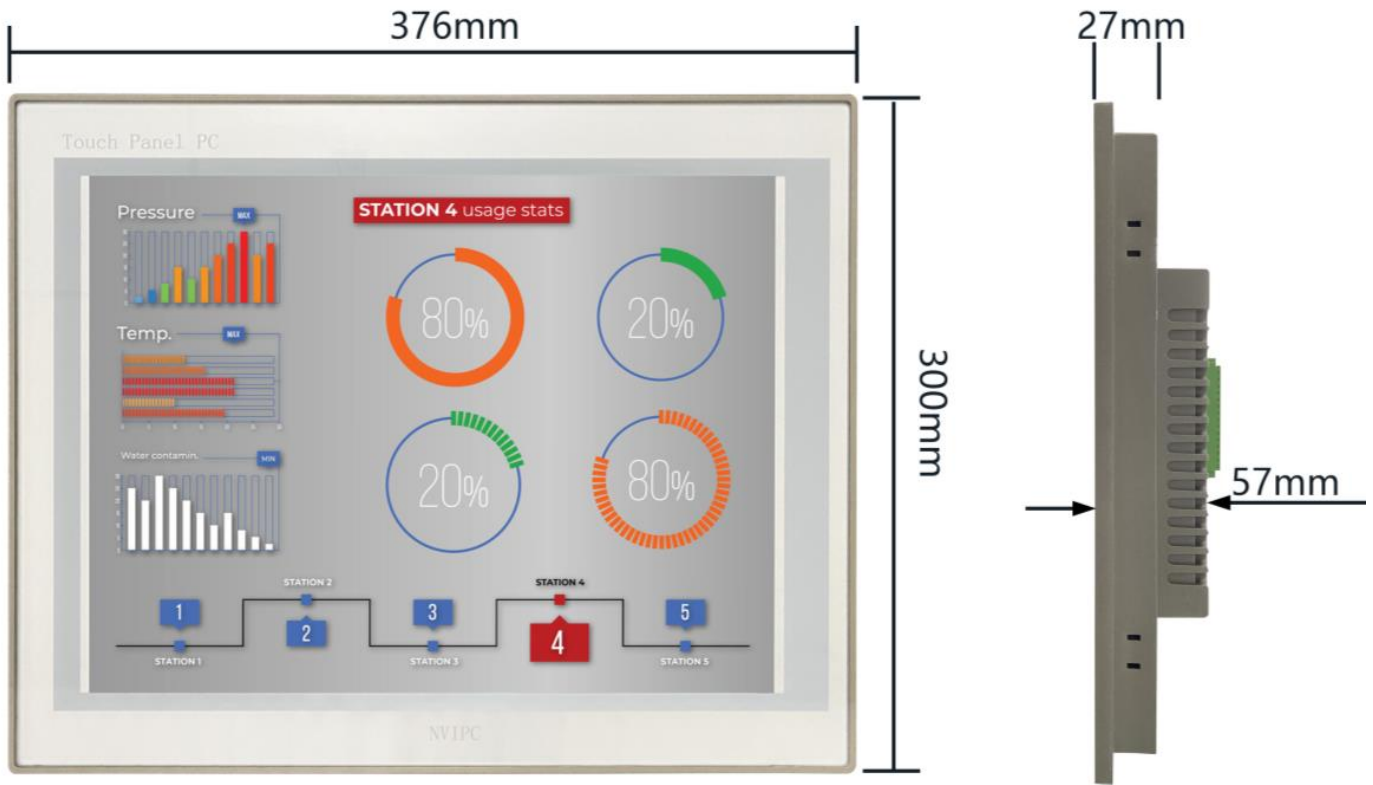


Figure 549: PPC-A72-150-C *Technical Drawing*

The PPC-A72-150-C Industrial Panel PC can be mounted with 8 x M4 screws or 4 x M4 screws using the VESA (100x100mm or 75x75mm) and Panel mounting methods, enabling simplified installation onto any standard mounting fixture.

### Panel Mounting

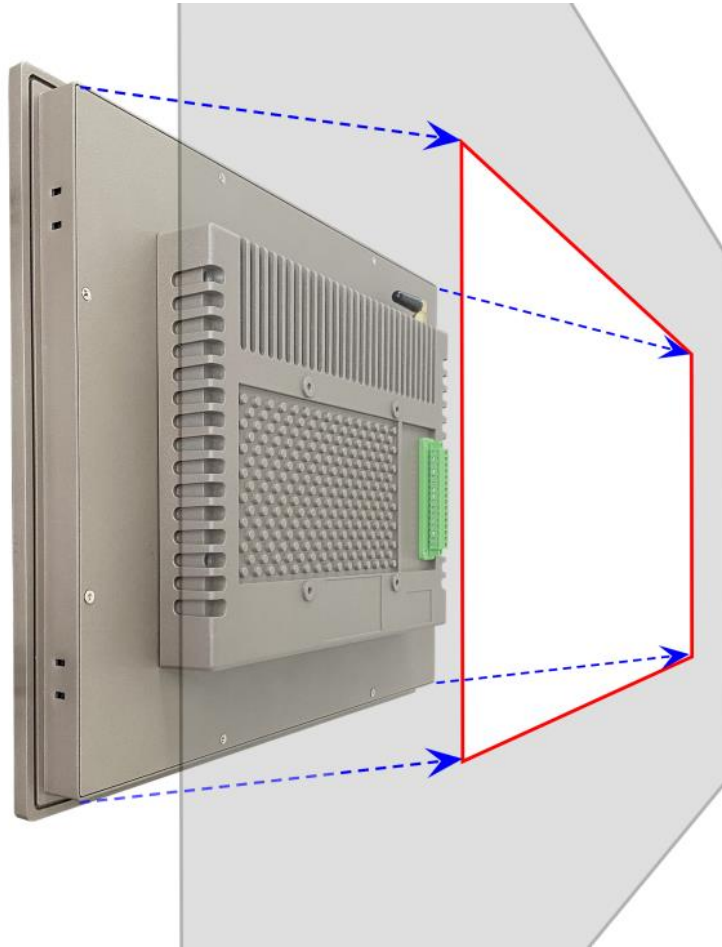


Figure 550: *Panel Mounting-1*

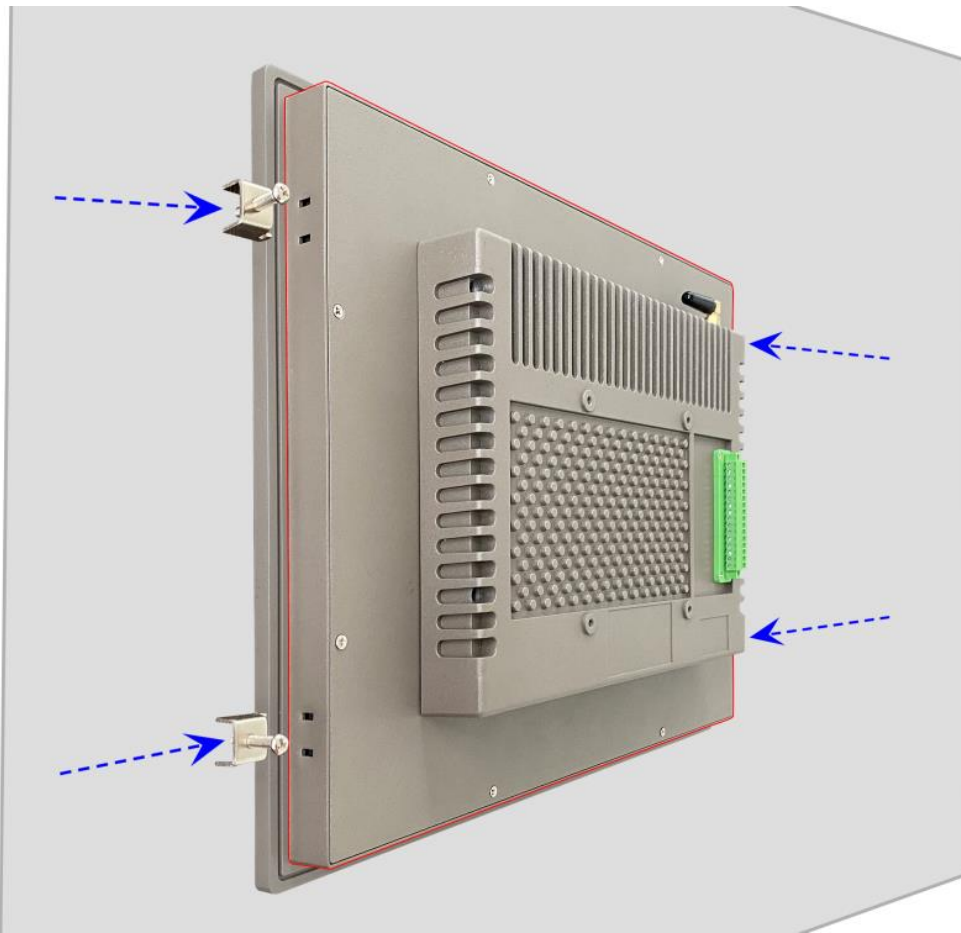


Figure 551: *Panel Mounting-2*

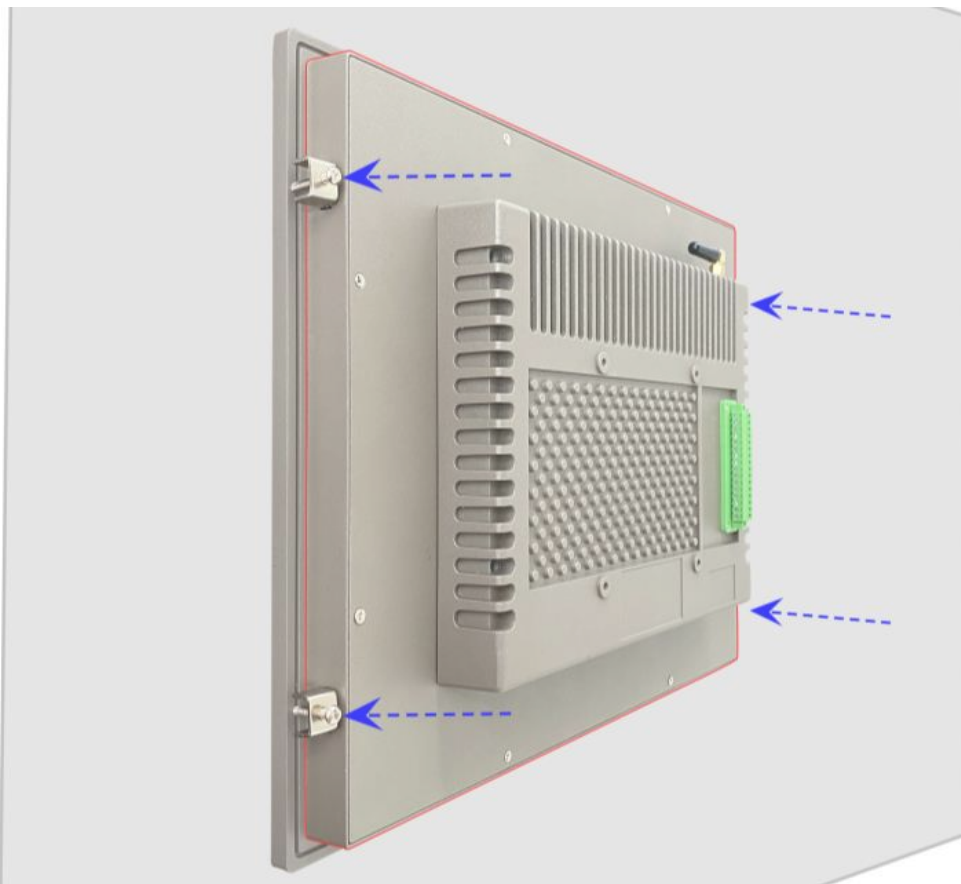


Figure 552: *Panel Mounting-3*



Figure 553: *Panel Mounting-4*

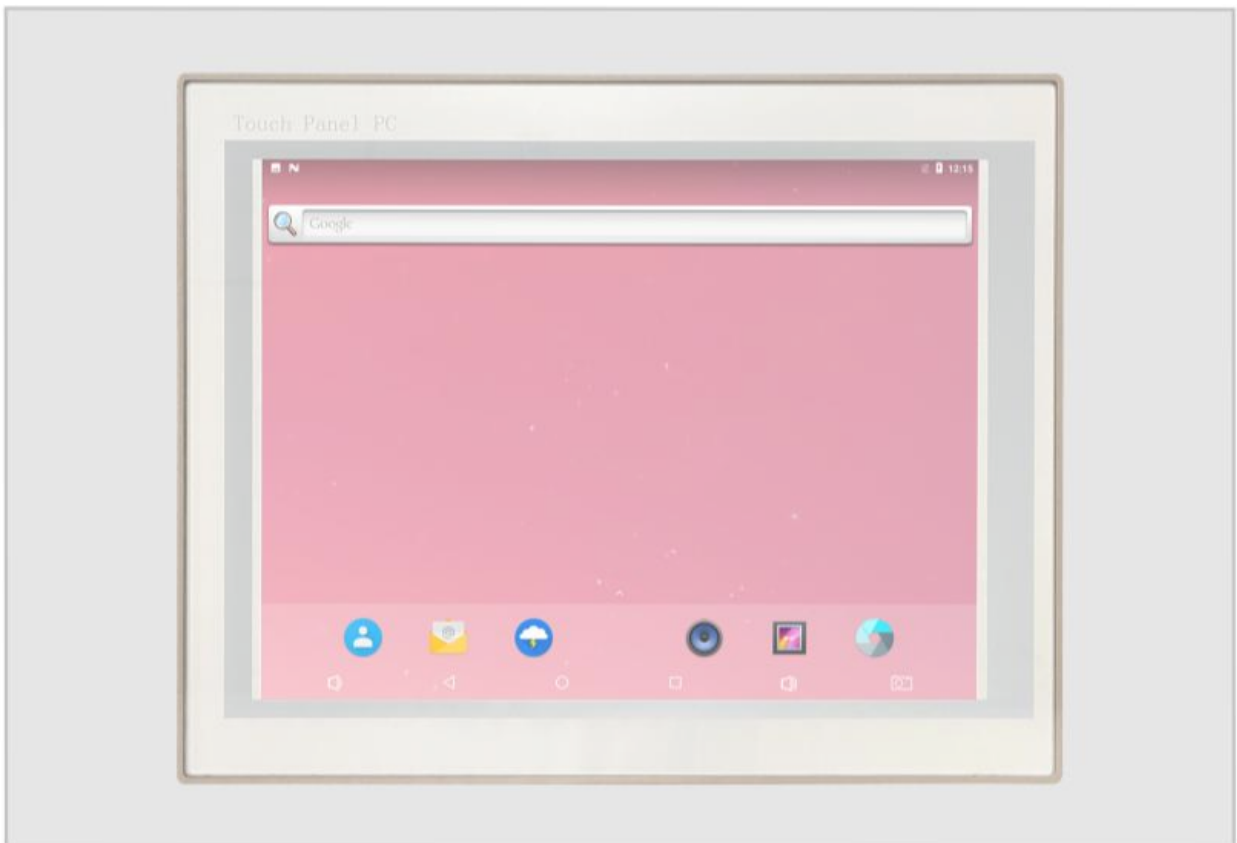


Figure 554: *Panel Mounting-5*

**Note**

Please make sure the display is not exposed to high pressure when mounting into an enclosure.


**VESA Mounting**

Figure 555: VESA Mounting-1



Figure 556: VESA Mounting-2



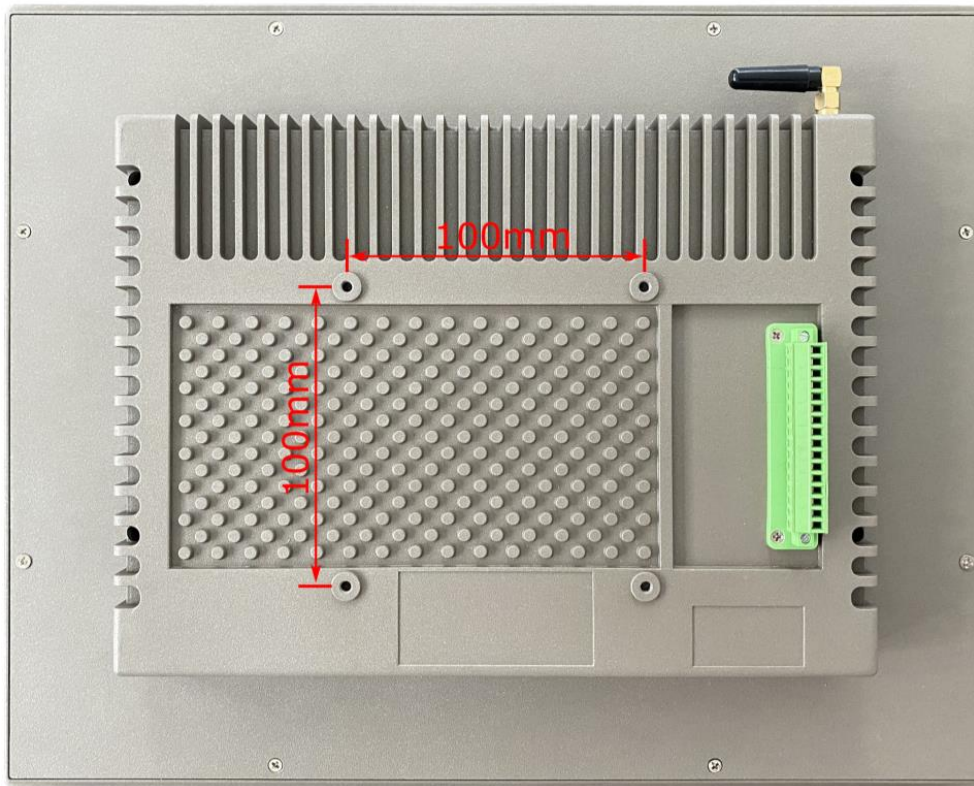

Figure 557: VESA Mounting-3



Figure 558: VESA Mounting-4

You can find detailed information about mounting in the [Mount IPC Guide](#).

## 3D Model

**As of Mar 23, 2024, the 3D asset of the product is being actively prepared, and will be available soon.**

PPC-A72-150-C 3D model can be viewed in the online doc in a web browser, **if you are reading from the PDF** version, please visit the online doc [PPC-A72-150-C](#), select hardware documentation, drag the navigation bar to the 3D Model section.

## Disclaimer

**This document is provided strictly for informational purposes. Its contents are subject to change without notice. Chipsee assumes no responsibility for any errors that may occur in this document. Furthermore, Chipsee reserves the right to alter the hardware, software, and/or specifications set forth herein at any time without prior notice and undertakes no obligation to update the information contained in this document.**

**While every effort has been made to ensure the accuracy of the information contained herein, this document is not guaranteed to be error-free. Further, it does not offer any warranties or conditions, whether expressed orally or implied in law, including implied warranties and conditions of merchantability or fitness for a particular purpose. We specifically disclaim any liability with respect to this document, and no contractual obligations are formed either directly or indirectly by this document.**

**Despite our best efforts to maintain the accuracy of the information in this document, we assume no responsibility for errors or omissions, nor for damages resulting from the use of the information herein. Please note that Chipsee products are not authorized for use as critical components in life support devices or systems.**

## Technical Support

If you encounter any difficulties or have questions related to this document, we encourage you to refer to our other documentation for potential solutions. If you cannot find the solution you're looking for, feel free to contact us. Please email Chipsee Technical Support at [support@chipsee.com](mailto:support@chipsee.com), providing all relevant information. We value your queries and suggestions and are committed to providing you with the assistance you require.